

- Sudut kemiringan minimal 12°
- Jarak reng/gording adalah max 1.2 m
- Jarak reng/gording pertama dari pertemuan kuda-kuda max 10cm
- Panjang overlap adalah 30 cm (ke atas 15 cm, ke bawah 15 cm)
- Jarak lisplang min 10 cm

- Recommended min. roof pitch (tilt angle) is 12°
- Recommended max. purlin distance 1.2 m
- Recommended purlin distance from the very top of the roof is 10 cm
- Allow 30 cm overlap (low pitch 15 cm & 15 cm for steeper one)
- Recommended min. overhang distance 10 cm

3 Pasang dan sambung Atap SKYDECK® di bagian interlock

3 Overlay the top part of anti-leakage interlocking system on top of the underlap



4 Pasang Skrup SDS Roofing seperti gambar diatas :

Pemasangan skrup untuk atap :

- Pada atap, setiap skrup harus dipasang diatas gelombang tinggi.
- Setiap skrup pada jarak reng/ gording harus di sesuaikan dengan ukuran 1.2 m.
- Setiap 1 m<sup>2</sup> membutuhkan 4 pcs SDS skrup panjang 75 mm.
- Pada overlap gunakan SDS skrup panjang 90 mm.

4 Screw installation for roofing :


- Put every screw on upper high wave structure of roof.
- Adjust screw with max 1.2 m purlin distance.
- Every 1 m<sup>2</sup> needs 4 pcs SDS screw with 75 mm length.
- On overlap use SDS screw with 90 mm length screw.

Pemasangan skrup untuk cladding:

- Pada cladding, setiap skrup harus di pasang ditengah gelombang rendah.
- Setiap skrup pada jarak/ gording harus disesuaikan dengan ukuran 1.2 m.
- Setiap 1 m<sup>2</sup> membutuhkan 4 pcs SDS skrup panjang 55 mm.
- Pada overlap gunakan SDS skrup panjang 70 mm.

Installation for cladding :

- Put every screw on the middle lower wave structure of roof.
- Adjust screw with max 1.2 m purlin distance.
- Every 1 m<sup>2</sup> needs 4 pcs SDS screw with 55 mm length.
- On overlap use SDS screw with 70 mm length.

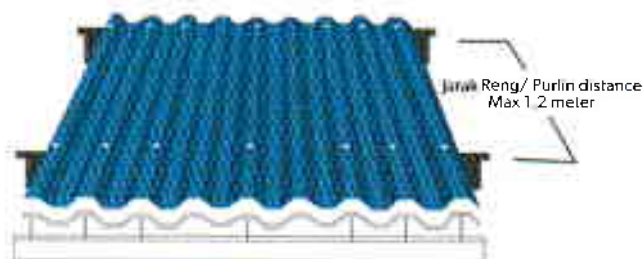

DISTRIBUTOR JAKARTA

**TIRTA**  
www.tirta.com

Telp.: (021) 5402812  
(021) 9870 8094  
0851 0017 9765

Hp : 0812 8318 602  
0818 841 588

